INSTALLATION INSTRUCTIONS



TYCROC BATHBOARD



Tycroc bathboard has been made from Tycroc TWP board, with the inner part being extruded polystyrene (XPS foam).

To ensure the rigidity and durability of the board, its waterproof foam core is covered with a layer of polymer cement mortar, on top of which there is reinforcing fibreglass mesh followed by another layer of polymer cement mortar.

This surface is immediately ready for finishing works.

CUTTING AND STORAGE

It is easy to cut a Tycroc bathboard with electrical circular saw, jig-saw, handsaw, or cut-off blade. For drilling of holes, rock, metal, and wood drills are suitable. There are no special storage requirements, but it is advisable not to store the boards edgeways to avoid possible damage (broken corners, etc.).



INSTALLATION INSTRUCTIONS






If necessary, cut the bathboards to the right size. Make sure that, apart from a Tycroc bathboard, there would also be space under the bath for ceramic tiles or natural stone to be used later. Apply Tycroc Premium Fix adhesive sealant to the upper edge of the bathboard, so that the edge would be continuously covered with adhesive sealant.



Apply similar line of the adhesive sealant to the board edge coming into contact with the rear wall. Thereafter, install the board to the intended place under the bath edge, then level and fasten it.

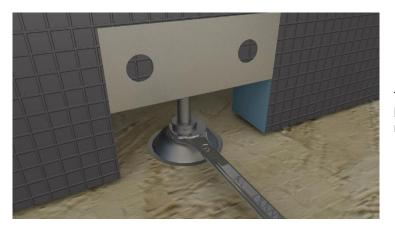

The bathboard can be fastened using the adjustable legs, raising the board firmly up to the bath edge. 13 mm spanner is suitable for adjusting.



If necessary, repeat the same procedure on the other side of the bath. Fasten and insulate the boards mutually, using adhesive sealant Tycroc Premium Fix.

INSTALLATION INSTRUCTIONS





Such surface is ready for finishing work (plastering, painting, tiling etc.) If necessary, inspection openings can be cut into the board.

NB! The above installation instruction describes only the installation of Tycroc bathboards. The pictures of the background walls or the floor are illustrative. More detailed instructions for the wall or floor construction using Tycroc products are available as separate installation instruction.

PRODUCT CODES AND BATHBOARD DIMENSIONS

PRODUCTS	DIMENSIONS
BCS30	2100x600x30 mm
BCH30	770x600x30 mm

